
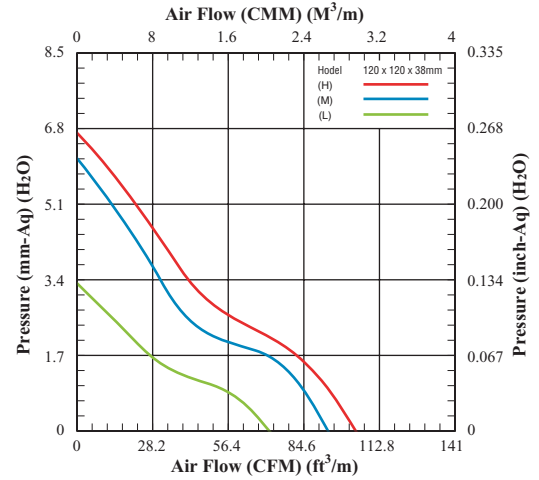


120 x 120 x 38mm

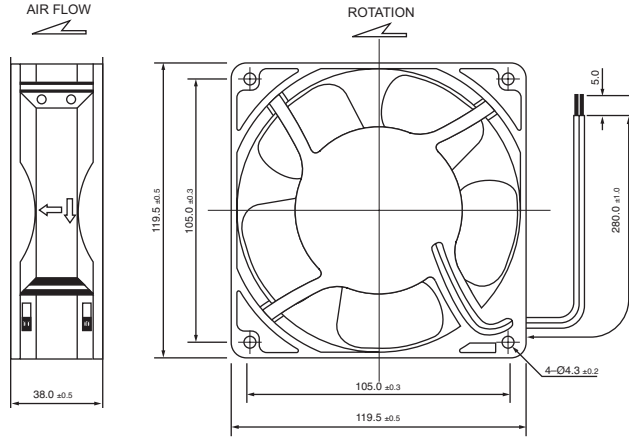

Frame Type: Aluminum painted & Plastic UL94V-O  
Impeller: Thermoplastic UL94V-O P.B.T.

Model	Part No. Terminal Leadwire	Bearing System	Rated Voltage	Current	Input Power	Speed	Air Flow	Static Pressure	Noise Level	Weight
(型號)	(端子/出線)	(培林)	(V)	(A)	(W)	(rpm)	(CFM)	(mm-H <sub>2</sub> O)	(dB-A)	(g)
HPE-1238HD1	1238HD1S(B)PL	Sleeve Ball	12	0.50	6.00	2800	104.8	6.74	42.8	297
HPE-1238MD1	1238MD1S(B)PL	Sleeve Ball	12	0.35	4.20	2540	94.0	6.11	41.0	297
HPE-1238LD1	1238LD1S(B)PL	Sleeve Ball	12	0.24	2.88	1950	72.38	3.37	32.9	297
HPE-1238HD2	1238HD2S(B)PL	Sleeve Ball	24	0.32	7.68	2800	104.8	6.74	42.8	297
HPE-1238MD2	1238MD2S(B)PL	Sleeve Ball	24	0.23	5.52	2540	94.0	6.11	41.0	297
HPE-1238LD2	1238LD2S(B)PL	Sleeve Ball	24	0.14	3.36	1950	72.3	3.37	32.9	297

Specifications subject to change without notice.  
以上參考數據，如有變更恕不另行通知。