

HP POWER CONVERTER & CHARGER DC - DC Converter Charger

12V / 24V DC to 12V / 5A Cigar Socket + 5V / 1A - 2A USB

DC-50CU

100L x 76W x 38H (mm)
12V/24V DC
To
12V/5A
5V/1A-2A




12V/5A Output for Car Equipments



5V/1A-2A Output for Digital Products also compatible with Apple Products



12V/24V DC Input Automatic in Cigar Plug

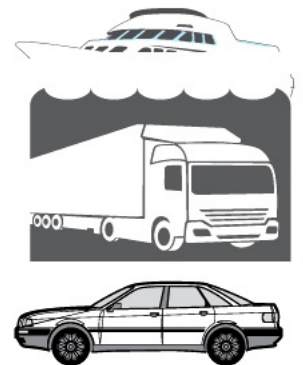

Specifications :

Model	DC50CU	
Input Voltage Range	12VDC - 30VDC automatic	
Output Voltage	12V	5V
Max. Output Current	5A	2.5A
Continuous Current	4A	1A-2A
No Load Input Current	≤ 50mA	
Line Regulation	0.1%	
Load Regulation	0.02%	
Output Ripple Noise	100mV (rms)	
Efficiency	Over 85%	
Indicators	Power on LED	
Inputs connection type	cigar plug wire length 1 M	
Output connection type	12V in cigar socket / 5V in USB	
Input Fuse	5A Glass Fuse	
Dimensions L x W x H (mm)	100 x 76 x 38	
Weight (kg)	0.2	

Product Features :

- Special design and decorous aluminum heat sink housing
- Less heat dissipation without over-heating problem
- High efficiency over (85%)
- Good load and line regulations
- Output over-voltage and current protections
- Output current limit with noise filter
- Input with cigar plug wire length 1 meter
- Output with cigar socket & USB

